


AC40 Compressor Addendum



RELAY ADJUSTMENT (Location: AC40, behind access panel)

1. Open the access panel located on the AC40 compressor.
2. There are three relays immediately visible inside the panel. Locate the Timer Relay, which has dip switches on the face near the mounting bracket.
3. Remove the Timer Relay from the AC40. This will require removing the mounting screw and disconnecting the relay.
4. Toggle the dip switches so that switch 1 is on and switch 2 is off.
5. Rotate the dial to the most counterclockwise position. The arrow will point approximately to the lower left corner.
6. Reconnect the Timer Relay and securely mount it back in the original location.
7. Close and securely latch the access panel.

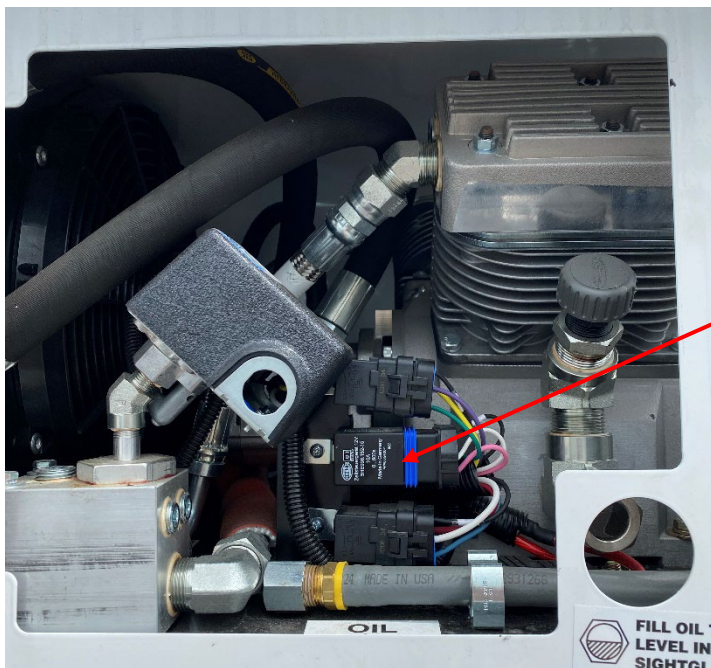


Inside the AC40 compressor

Timer Relay

Dial in desired position

Dip switches in desired positions

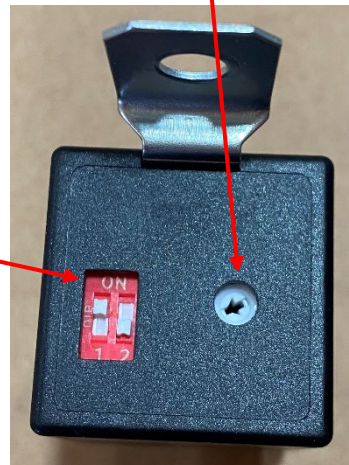

Timer Relay face